




SOCIETÀ ITALIANA TECNOSPAZZOLE

THE PROFESSIONAL CHOICE



Date: 07/10/2008
Customer: WALSH
ENGINEERING
SUPPLIES LTD
Customer's code: 974400


TECHINCAL PRODUCT DATA SHEET

SIT Code	Description	Brush Picture
U51183856000	522 REF U5201 F22 ATL050 CONF 5/20* Twisted knots wheel brush Smooth bright steel wire Ø 0.50	

APPLICATIONS:

- aggressive brushes, suitable for heavy duty applications at high rotating speed, such as preparation and finishing of seam weldings, deburring and mechanical pickling.
- removal of slags collected inside narrow slots of any dimension.
- burrs removal.

MAXIMUM ROTATING SPEED : 9000 RPM

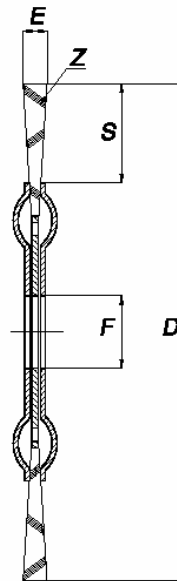

D = 200 mm
S = 43 mm
F = 22,2 mm
E = 8 mm
Z = 32 knots

SAFETY INSTRUCTIONS:

All the instructions enclosed to the brush box shall be strictly observed; in particular, but not only: never exceed MAX-RPM value; individual protective equipment must be worn such as goggles, gloves, face guard and shield, against particles ejection and e dangerous temperature onset; staff members without protections shall not allowed to stay around the worker, check brush locking on the electric tool and its maintenance onto the shaft; filaments should always work by tip, don't exceed with pressure, to be reduced at minimum when brushing sharp edges.



ASSOSPAZZOLE

SPAZZOLE TECNICHE PER L'INDUSTRIA
SPAZZOLE PER FERRAMENTA E UTENSILERIA
SPAZZOLE PER AUTOSPAZZATRICI STRADALI E AEROPORTUALI
PISTE IN PLASTICA PER SCI DI DISCESA, FONDO E SALTO